

EDWIN D. SCHINDLER

PATENT, TRADEMARK & COPYRIGHT ATTORNEY

FIVE HIRSCH AVENUE

CORAM, NEW YORK 11727

Jc135 U.S. PTO
09/102340
06/22/98

Postal Address

P. O. Box 966

Coram, New York 11727-0966

TELEPHONE: (516) 474-5373

TELEX: 230199 SWIFT UR

ADDRESS TELEX "ATT EDS"

FAX: (516) 474-5374

June 22, 1998

Hon. Commissioner of Patents and Trademarks
Washington, D. C. 20231

Dear Sir:

Transmitted herewith for filing (with Express Mail
Certificate of Mailing) is the patent application of:

Inventors: Henry Garnet Wolsey, a United Kingdom citizen
Whiteleys, Little Treffgarn
Haverfordwest, Pembrokeshire SA62 5DY
United Kingdom

Althea Wolsey, a United Kingdom citizen
Whiteleys, Little Treffgarn
Haverfordwest, Pembrokeshire SA62 5DY
United Kingdom

Title: COOLING POUCH

Related Application: This application is a continuation-in-
part of P.C.T. Application No. PCT/GB97/02930, filed
October 23, 1997 (which designates the United States.)

Priority: October 23, 1996, United Kingdom Patent Appl. No.
9622047.0; and, April 4, 1997, United Kingdom Patent Appl.
No. 9706888.6.

Enclosed: (1) Specification (13 Pages w/Abstract)
+ Cover Page
(2) Claims - Thirty-Two (32) - 2 Ind. + 30 Dep.
(3) Drawings - 4 Sheets (FIGS. 1 - 5)
(4) Copy of PCT/GB97/02930 (parent application)
(5) P.C.T. International Search Report
(6) Information Disclosure Statement
w/References cited in Int'l Search Report
(7) Return-postcard for indication by the
Patent and Trademark Office of the serial no. and
confirmation of the filing date.

A Declaration/Power of Attorney, applicable filing fee
and Small Entity Statement will be filed hereinafter with the
appropriate surcharge as required by the Patent and Trademark
Office. All correspondence should be forwarded to the

(next page)

Hon. Commissioner of Patents
and Trademarks


-2-

June 22, 1998

undersigned at: Edwin D. Schindler, Five Hirsch Avenue,
P. O. Box 966, Coram, New York 11727-0966.

Pursuant to the provisions of 37 C.F.R. §§1.10 and 1.53,
Applicant respectfully requests that this application be
accorded a serial number and a filing date of June 22, 1998.

Respectfully submitted,



Edwin D. Schindler
Attorney for Applicant
Reg. No. 31,459

Sent: Express Mail-Post Office to Addressee on 6/22/98
Express Mail Label No. EE 556985865 US

2025 RELEASE UNDER E.O. 14176

UNITED STATES SPECIFICATION

TO ALL WHOM IT MAY CONCERN:


We, HENRY GARNET WOLSEY, a citizen of the United Kingdom, residing at Whiteleys, Little Treffgarn, Haverfordwest, Pembrokeshire SA62 5DY United Kingdom; and ALTHEA WOLSEY, a citizen of the United Kingdom, residing at Whiteleys, Little Treffgarn, Haverfordwest, Pembrokeshire SA62 5DY United Kingdom, have invented certain new and useful improvements in a

COOLING POUCH

of which the following is a Specification.

"Express Mail" mailing label number EE 556985865 US
Date of Deposit June 22, 1998

I hereby certify that this paper is being deposited with the U.S. Postal Service "Express Mail - Post Office to Addressee" service under 37 C.F.R. §1.10 on the date indicated above and is addressed to: Hon. Commissioner of Patents and Trademarks, Washington, D. C. 20231.



Edwin D. Schindler, Reg. No. 31,459

June 22, 1998
Date

Cooling Pouch

This is a continuation-in-part of P.C.T. international Application No. PCT/GB97/02930 (which designates the United States), filed October 23, 1997. BACKGROUND OF THE INVENTION

The present invention relates to cooling pouches, such pouches being typically for storing medication, such as vials of insulin or the like.

Persons afflicted by diabetes mellitus ("diabetes") are unable to secrete sufficient insulin, which results in excess of sugar in the bloodstream. Sufferers from diabetes may require treatment consisting of hypodermic injections of insulin, as the latter assists the body to metabolize the excess sugar. It is often necessary to store insulin ready for use by injection or the like.

In order to maintain an insulin preparation in a fresh condition, it should be kept at a temperature lower than normal ambient temperature. This requires that the insulin should be stored in a refrigerator or other cooling device, such as, for example, an ice box. However, people suffering from diabetes who require several injections of insulin per day are inconvenienced if they are away from home for a long period of time.

WO83/04089 discloses a portable carrying pouch which contains a removable refrigerating agent, for use when storing insulin. Other portable carrying devices are known for purposes, other than storage of medicines, for example, for carrying food. By way of example, US patent 4211091 discloses a pliable, insulated bag for use as a lunch bag for temporary storage of foodstuffs; US patent 4530220 discloses a deformable bag for use as a cooling medium, which bag comprises an envelope filled with a gel substance, the whole bag being intended to be cooled to a temperature less than -10°C .

Japanese patent application 6178792A discloses a medical insulating appliance having high cooling, anti-flammatory and disinfecting effects. Such an appliance is typically used after cooling in a refrigerator. However, such an appliance is designed for cooling a body part and not for transporting and/or cooling medicament.

OBJECTS OF THE INVENTION

It is an object of the present invention to provide a portable cooling pouch which does not require refrigeration.

It is a further object of the invention to provide a pouch for cooling vials and the like, which does not contain removable refrigeration parts.

It is yet a further object of the invention to provide a pouch which can be used as a cooling device even when the user may have no access to a refrigerator, ice box or the like.

SUMMARY OF THE INVENTION

A portable pouch according to the invention, for cooling and storing vials and the like comprises:

- (a) a first web member of water permeable material;
- (b) a second web member of water permeable material;
- (c) hinge means connecting an edge of said first web member, directly or indirectly, to said second web member; and
- (d) fastening means for fastening remaining edges of said first web member to remaining edges of said second web member.

At least one of the web members includes a plurality of compartments each containing water-absorbent granular material, the hinge area being free of such compartments.

Typically, each of the web members comprises a plurality of such compartments, each of which contains the water-absorbent granular material.

Preferably each of the web members is of quadrilateral shape, such as rectangular.

The web members are preferably integrally formed with one another from a single web, arranged to be folded along the hinge.

The fastening means typically comprise at least one first element comprising a multiplicity of hooks, and at least one complementary second element comprising a multiplicity of loops engageable with the hooks on the first element. Both the first and second elements are typically in the form of strip or tape.

Preferably, the web members are arranged to be fastened together by the fastening means in such a way that one web member extends beyond the free edge of the other of the web members, so as to form a flap foldable over a marginal portion of the other web member.

Such a flap preferably has fastening means on a first face of the one web member for engagement with complementary fastening means on the marginal portion on the other web member.

According to a first embodiment of the invention, the hinge means connect an edge of the first web member directly to the second web member.

According to a second embodiment of the invention, the hinge means connect an edge of the first web indirectly to the second web member.

In the second embodiment, there is preferably an intervening panel connecting the hinge means to the second web member. In this embodiment, the pouch can, in some arrangements, take the form of a substantially closed box, in which the first web member provides a closure for a tray constituted by the second web, the above-mentioned panel and a plurality of edge panels. However, it is envisaged in this embodiment that the first web member, the second web member, the intervening panel and the edge panels can be formed from a single web.

Preferably, the water permeable material comprises a durable, flexible textile material, such as a woven fabric. A particularly preferred textile material comprises a polyester/cotton fabric blend, although other textile materials such as a nylon or an acrylic may also be used.

It is particularly preferred that the water-absorbent granular material is one which has a transition between respective hydrated forms at or close to ambient temperature, such that the latent heat absorbed or evolved on passage through the transition temperature helps to maintain the temperature substantially constant for a prolonged period.

At least one further sewing line is preferably provided transverse to the sewing lines mentioned above so as to control the distribution of the water-absorbent material along the length of the respective compartment or compartments. It is preferred that the further sewing line is provided along the hinge means.

The present invention further comprises a method of storing a closed container of medicine (preferably a vial or the like) which comprises treating the web members of a pouch as described above with cold water, either before or after shaping the web members to form the pouch, so as to cause swelling of the water-absorbent material within the compartments thereof, and disposing the container within the pouch while the compartments contain the swollen water-absorbent material.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 is a plan view of a first embodiment of the pouch;

Figure 2 is a cross-section along the line AA shown in Figure 1;

Figure 3 is a plan view of a second embodiment of the pouch;

Figure 4 is a plan view of a third embodiment of the pouch; and

Figure 5 is a plan view of a carrier which may be used with a cooling pouch according to the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to the drawings (and initially to Figures 1 and 2), a fabric web 1 includes a double-skinned front fabric panel 2 and a corresponding double-skinned rear fabric panel 3. The front panel 2 has a series of parallel, longitudinally extending stitching lines 11, which (with the corresponding edges of the respective panel) form respective compartments 4a, 4b and 4c, each of which contains water-absorbent grains 5 of sodium polyacrylate (see Figure 2).

The rear panel 3 also has a series of parallel, longitudinally extending stitching lines 12, which (with the corresponding edges of the respective panel) form respective compartments 6a, 6b and 6c. A strip 7a of one part of a hook-and-loop type fastener of the type commercially available under the trade mark Velcro is sewn to a side edge of the front panel 2; a complementary part of the fastener 9a is sewn to a side edge of the rear panel 3.

A further strip 7b of one part of such a hook-and-loop type fastener is sewn to the opposed side edge of the front panel 2; a complementary part of the fastener 9b is sewn to the corresponding side edge of rear panel 3.

A foldline 8 is provided between the front panel 2 and the rear panel 3. This foldline is preferably defined by a row of stitching which separates compartment 4a from 6a, compartment 4b from 6b, compartment 4c from 6c, and compartment 4d from 6d.

The whole web may be immersed in cold water, typically for about 90 seconds; the grains 5 then form a gel-like substance which can retain the temperature of the water for approximately 3 to 4 days. By taking advantage of evaporative cooling, the contents of the pouch may be at an even lower temperature than the initial temperature of the water. If a temperature significantly lower than that of the cold water is required, it is possible to even further cool the web by placing the whole web in a refrigerator, or the like.

Once the web is at the desired temperature, it is folded along the foldline 8, in order that the front panel 2 can be fastened to the rear panel 3 by means of the fastener 7a,7b, 9a,9b so as to form a pouch. Insulin or other medication that needs to be stored at a lower temperature than room temperature, can then be stored in the pouch, typically in vials or the like, for a period of typically 3 to 4 days.

Referring to Figure 3, a fabric webbed box-like pouch 31 comprises a double skinned bottom fabric panel 32 and a corresponding double skinned top fabric panel 33. The bottom panel 32 is attached to the top panel 33 indirectly by hinge panel 34. Hinge panel 34 is attached to the bottom panel 32 along stitching line 35; hinge panel 34 is also attached to the top panel 33 along stitching line 36.

Three further upstanding wall panels 37, 38 and 39 are attached to the bottom panel 32 along respective stitching lines 40, 41 and 42 to form a box-like structure. The top panel 33 can be attached to the upstanding wall panels 37, 38 and 39 by zip fastening 43.

The bottom panel 32 has a series of parallel, longitudinally extending stitching lines 44, which (with the corresponding edges of the respective panel) form respective compartments 45a, 45b and 45c, each of which contains water-absorbent grains 5 of sodium polyacrylate (corresponding to those described above with reference to Figure 2).

The top panel 33 also has a series of parallel, longitudinally extending stitching lines 46, which (with the corresponding edges of the respective panel) form respective compartments 47a, 47b and 47c.

The whole pouch may be immersed in cold water, typically for about 90 seconds, as described above with reference to the web of Figure 1.

Referring to Figure 4, a fabric web 50 comprises a double-skinned front fabric panel 51 and a corresponding double-skinned rear fabric panel 52. The front panel 51 has three parallel, longitudinally extending stitching lines 53a, 53b and 53c, which form respective compartments 54a and 54b, each of which contains water-absorbent grains of sodium polyacrylate 59.

The fabric web 50 further comprises a further stitchline 55 transverse to stitchlines 53, substantially halfway along the length of stitchlines 53, to form a center foldline 56.

The web 50 is thereby folded along foldline 56 and the edges 57 and 58 are secured together (either by a permanent stitchline (not shown), or by hook-and-loop type fastener of the type commercially available under the trade mark VELCRO (not shown)).

Referring to Figure 5, a carrying pocket or sachet 60 is provided to carry a cooling pouch according to the present invention.

An elongate fabric web member 61, typically of a fabric which has breathable and high absorption characteristics, such as the fabric known under the trade mark CAMBRELLE, is folded about a foldline 62. The foldline 62 is arranged such that the first end 63 of web member 61 extends beyond the second end 64, so as to form a foldable flap which may be attached to a portion of web 61 beyond the second end 64.

A cooling pouch according to the first aspect of the present invention is typically immersed in cold water, thereby allowing the grains of sodium polyacrylate to form a gel-like substance. The outer surface of the cooling pouch is then wiped to remove excess water and placed inside the carrying pocket.

Example

Measurements were made of the temperature of the inside of an empty pouch such as that shown in Figure 1. After immersion of the pouch in cold water, temperature measurements were made of the pouch which was suspended in an incubator where the air temperature was maintained close to 37.8°C (100°F) with low relative humidity (15%). Measurements were made at 10 minute intervals for periods of between 24 and 48 hours. The pouch maintained internal temperatures below 30°C for periods exceeding 14 hours.

Claims:

1. A portable pouch for cooling and storing vials and the like, said pouch comprising:
 - (a) a first web member of water permeable material;
 - (b) a second web member of water permeable material;
 - (c) hinge means connecting an edge of said first web member, directly or indirectly, to said second web member;
 - (d) fastening means for fastening remaining edges of said first web member to said second web member, wherein at least one of said web members includes a plurality of compartments each containing water-absorbent granular material and said hinge means is free of such compartments.
2. A pouch according to claim 1, wherein each of said web members comprises a plurality of said compartments.
3. A pouch according to claim 1, wherein each of said web members is of a quadrilateral shape.
4. A pouch according to claim 1, wherein each of said web members is integrally formed from a single web, arranged to be folded along said hinge means.
5. A pouch according to claim 1, wherein said fastening means comprise at least one first element comprising a multiplicity of hooks, and at least one complementary second element comprising a multiplicity of loops engageable with said hooks.
6. A pouch according to claim 5, wherein said complementary elements are in the form of strip or tape.

00102710-062200

7. A pouch according to claim 1, wherein said web members are arranged to be fastened together by said fastening means in such a way that one end of one said web member extends beyond a free edge of the other of said web members, so as to form a flap foldable over a marginal portion of said other web member.
8. A pouch according to claim 7, wherein said flap has fastening means on a first face of said one web member for engagement with complementary fastening means on the marginal portion on said other web.
9. A pouch according to claim 1, wherein said hinge means are arranged to connect an edge of said first web member directly to said second web member.
10. A pouch according to claim 1, wherein said hinge means are arranged to connect an edge of said first web indirectly to said second web member.
11. A pouch according to claim 10, wherein an intervening panel connects said hinge means to said second web member.
12. A pouch according to claim 10, which is arranged to form a substantially closed box.
13. A pouch according to claim 12, wherein said second web member provides a closure for a tray constituted by said first web member, said intervening panel and a plurality of edge panels.
14. A pouch according to claim 13, wherein said first web member, said second web member, said intervening panel and said edge panels are formed from a single web.

15. A pouch according to claim 1, wherein said edges are along longitudinally extending edges of the respective web members.
16. A pouch according to claim 1, wherein said water permeable material comprises a durable, flexible textile material.
17. A pouch according to claim 16, wherein said textile material comprises a woven fabric.
18. A pouch according to claim 17, wherein said woven fabric comprises a polyester/cotton fabric blend.
19. A pouch according to claim 1, wherein said water-absorbent material is one which is capable of regeneration after it has been dried out.
20. A pouch according to claim 1, wherein said water-absorbent material comprises a polymeric material.
21. A pouch according to claim 20, wherein said polymeric material comprises an acrylic polymer.
22. A pouch according to claim 21, wherein said acrylic polymer comprises a cross-linked acrylate or methacrylate polymer.
23. A pouch according to claim 1, wherein said granular material has a transition between respective hydrated forms at or close to ambient temperature.
24. A pouch according to claim 1, wherein said compartments containing said water-absorbent material are formed by sewing an elongate double skinned web member in sewing lines extending along the length of said web member.

25. A pouch according to claim 24, which includes a plurality of said sewing lines which divide said web members lengthwise into a plurality of said compartments.
26. A pouch according to claim 25, wherein at least one further sewing line is provided transverse to said lengthwise direction.
27. A pouch according to claim 26, wherein said further sewing line is provided along said hinge means.
28. A pouch according to claim 1, which is flexible.
29. A method of storing a closed container of medicine, which comprises providing a pouch according to claim 1, treating the web members thereof with cold water, so as to cause swelling of said water-absorbent material within said compartments, and disposing said container within the pouch while the compartments contain the swollen water-absorbent material.
30. A method according to claim 29, wherein said container is a vial.
31. A pouch according to claim 1, in combination with a sachet shaped and dimensioned to receive said pouch.
32. A combination according to claim 31, wherein said sachet is of a breathable moisture-absorbing fabric.

Cooling Pouch

A portable flexible cooling pouch for cooling and storing vials containing medication. The pouch comprises opposed web members made of a water permeable material which are connected at the edges thereof. At least one of the web members comprises a plurality of compartments which contain a water-absorbent granular material.

FIGURE 1.

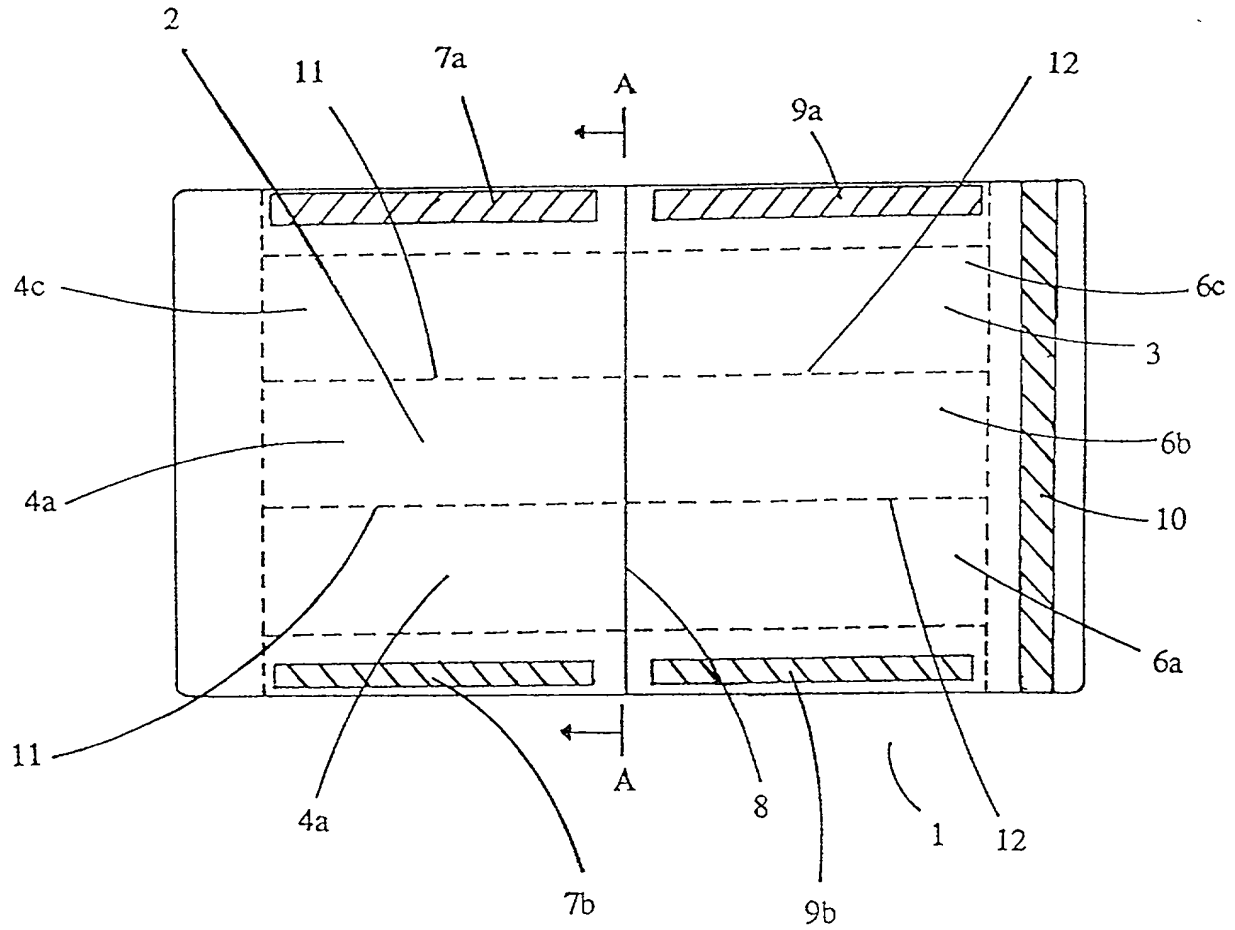


FIGURE 2.

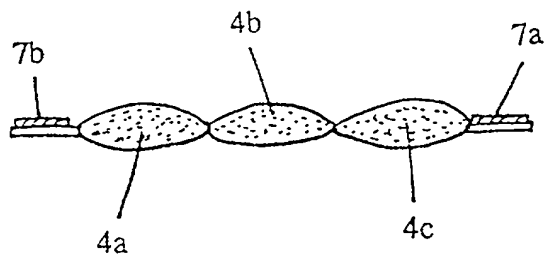


FIGURE 3.

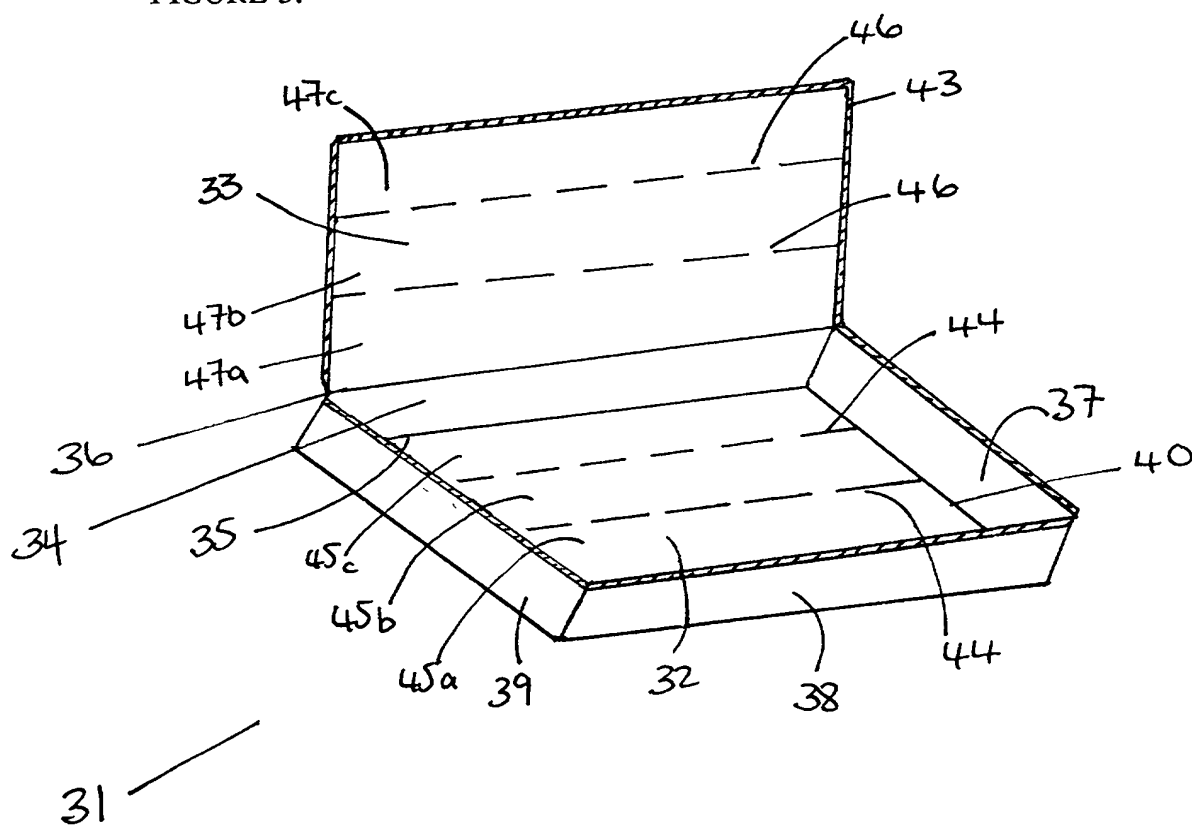


FIGURE 4



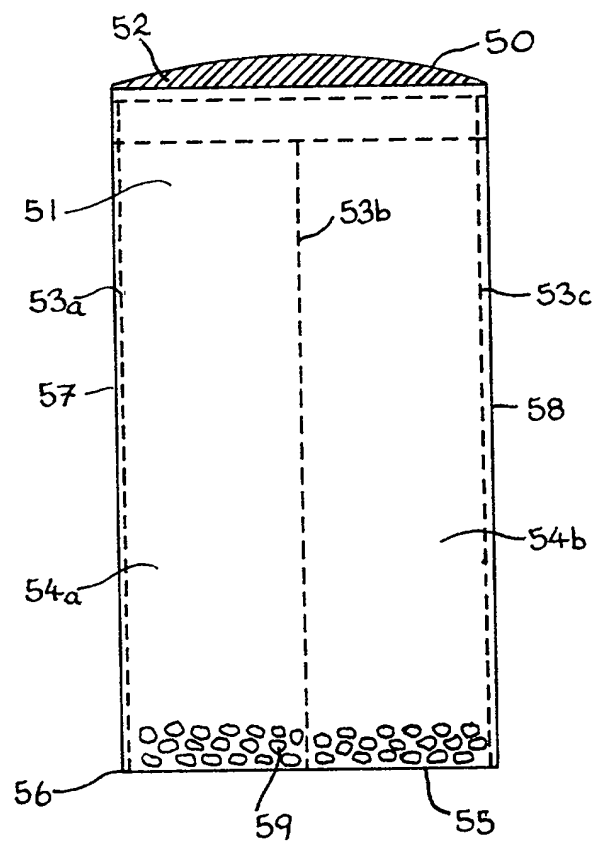


FIGURE 5

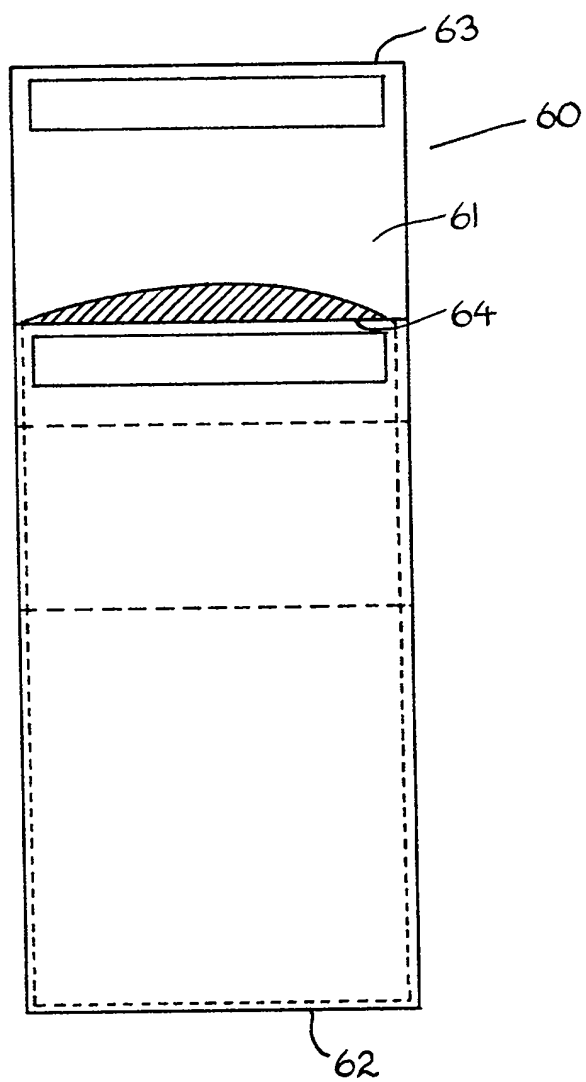

United States Patent & Trademark Office
Office of Initial Patent Examination – Scanning Division

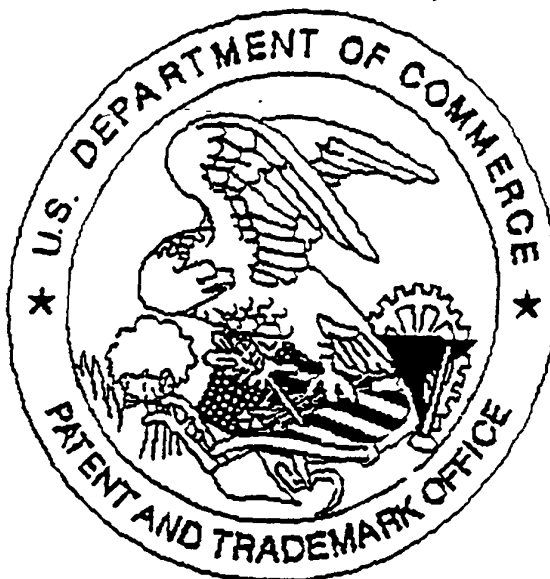

Application deficiencies found during scanning:

1. Application papers are not suitable for scanning and are not in compliance with 37 CFR 1.51 because:
- ☐ All sheets must be the same size and either A4 (21 cm x 29.7 cm) or 8-1/2" x 11" Pages _____ do not meet these requirements.
 - ☐ Papers are not flexible, strong, smooth, non-shiny, durable, and white.
 - ☐ Papers are not typewritten or mechanically printed in permanent ink on one side.
 - ☐ Papers contain improper margins. Each sheet must have a left margin of at least 2.5 cm (1") and top, bottom and right margins of at least 2.0 cm (3/4").
 - ☐ Papers contain hand lettering.
2. Drawings are not in compliance and were not scanned because:
- ☐ The drawings or copy of drawings are not suitable for electronic reproduction.
 - ☐ All drawings sheets are not the same size. Pages must be either A4 (21 cm x 29.7 cm) or 8-1/2" x 11".
 - ☐ Each sheet must include a top and left margin of at least 2.5 cm (1"), a right margin of at least 1.5 cm (9/16") and a bottom margin of at least 1.0 cm (3/8").
3. Page(s) _____ are not of sufficient clarity, contrast and quality for electronic reproduction.
4. Page(s) _____ are missing.
5. OTHER: No Declaration